


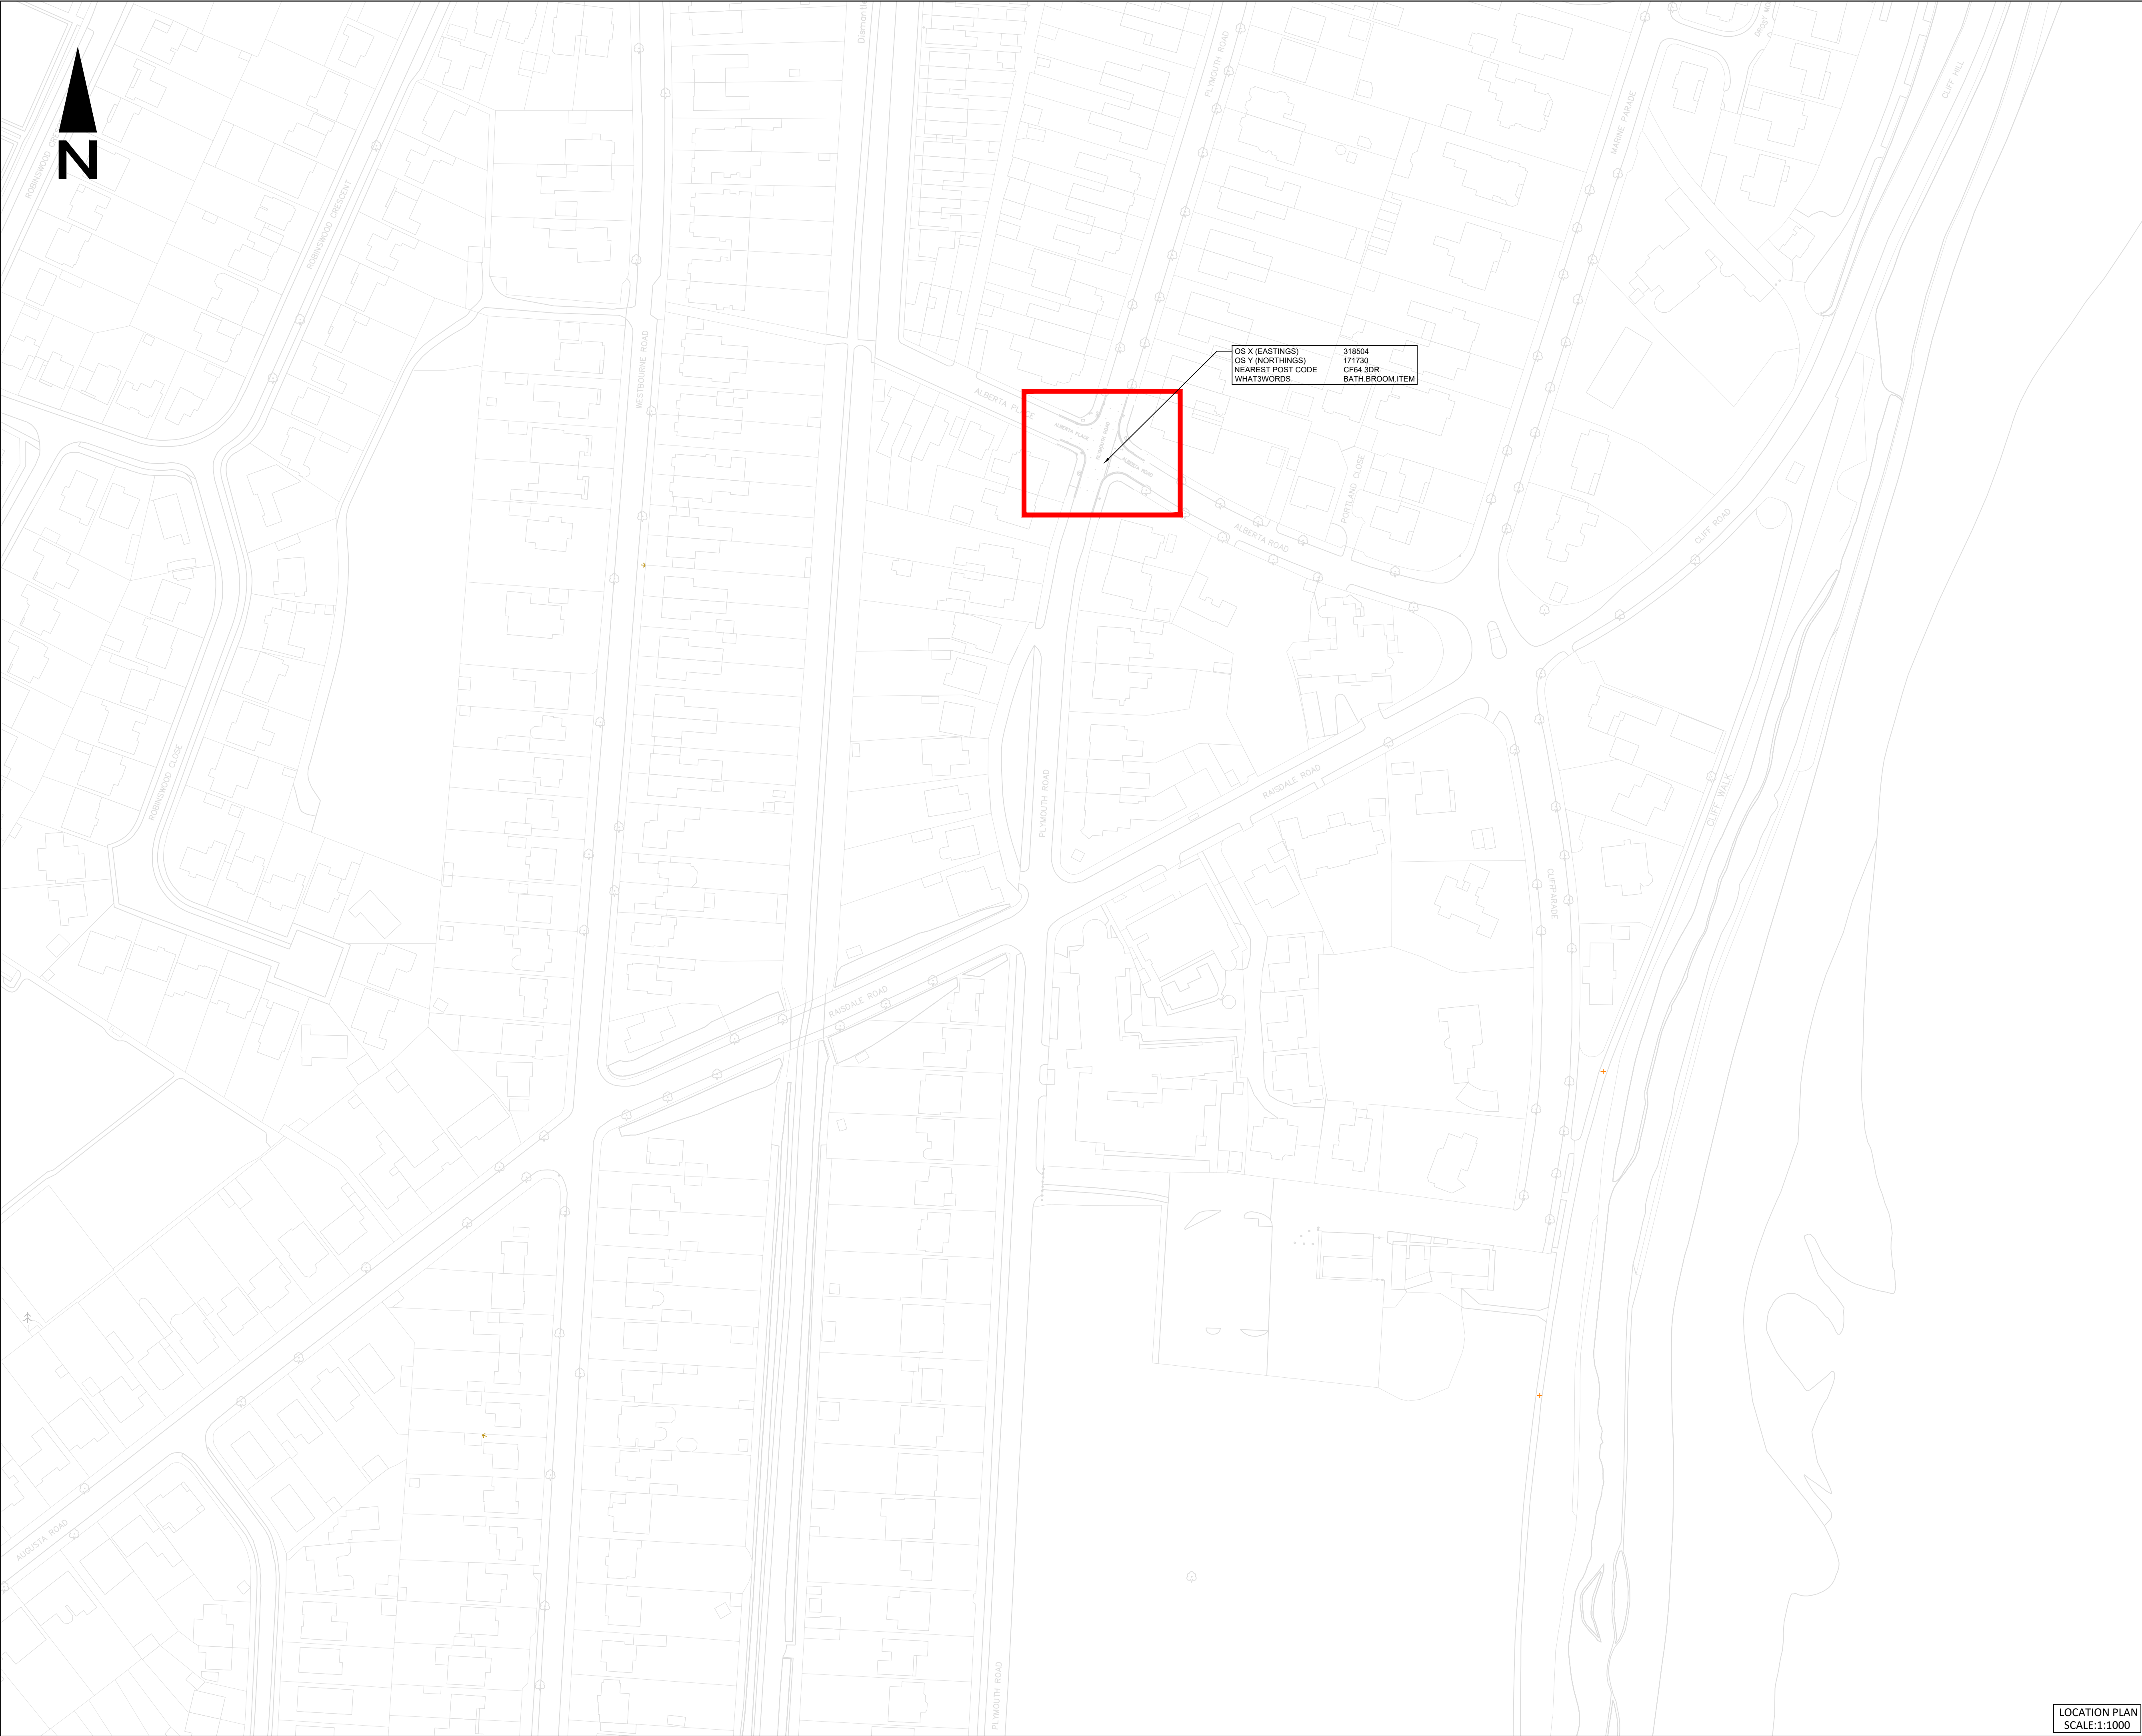

© Crown copyright and database rights 2016 Ordnance Survey 100025302 "You are not permitted to copy, sub-licence, distribute or sell any of this data to third parties in any form."

© Hawfraint y Goron a hawliau cronfa ddata 2016 Arolwg Ordnans 100025302 "Ni chaniateir i chwi gopio, tan-drwyddedu, dosbarthu neu werthu y data yma i unrhyw drydydd barti mewn unrhyw ffurf"

Drawing Status

CONSTRUCTION ISSUE

Rev	By	Description of Amendment	Chk By	Date	
Revisions					



ENGINEERING

Client

The Vale of Glamorgan Council

Project


ACTIVE TRAVEL IMPROVEMENTS
PLYMOUTH ROAD PENARTH

Drawing Title

LOCATION PLAN


Drawn	VLP	Scale	AS STATED @A1	Project No.	PROJNO	Drawing No.	100-001
Date	16/10/2026	File		Finance No.	325528	Rev	-
Checked	JL	Window					
Date	29/10/2026						

LOCATION PLAN
SCALE:1:1000

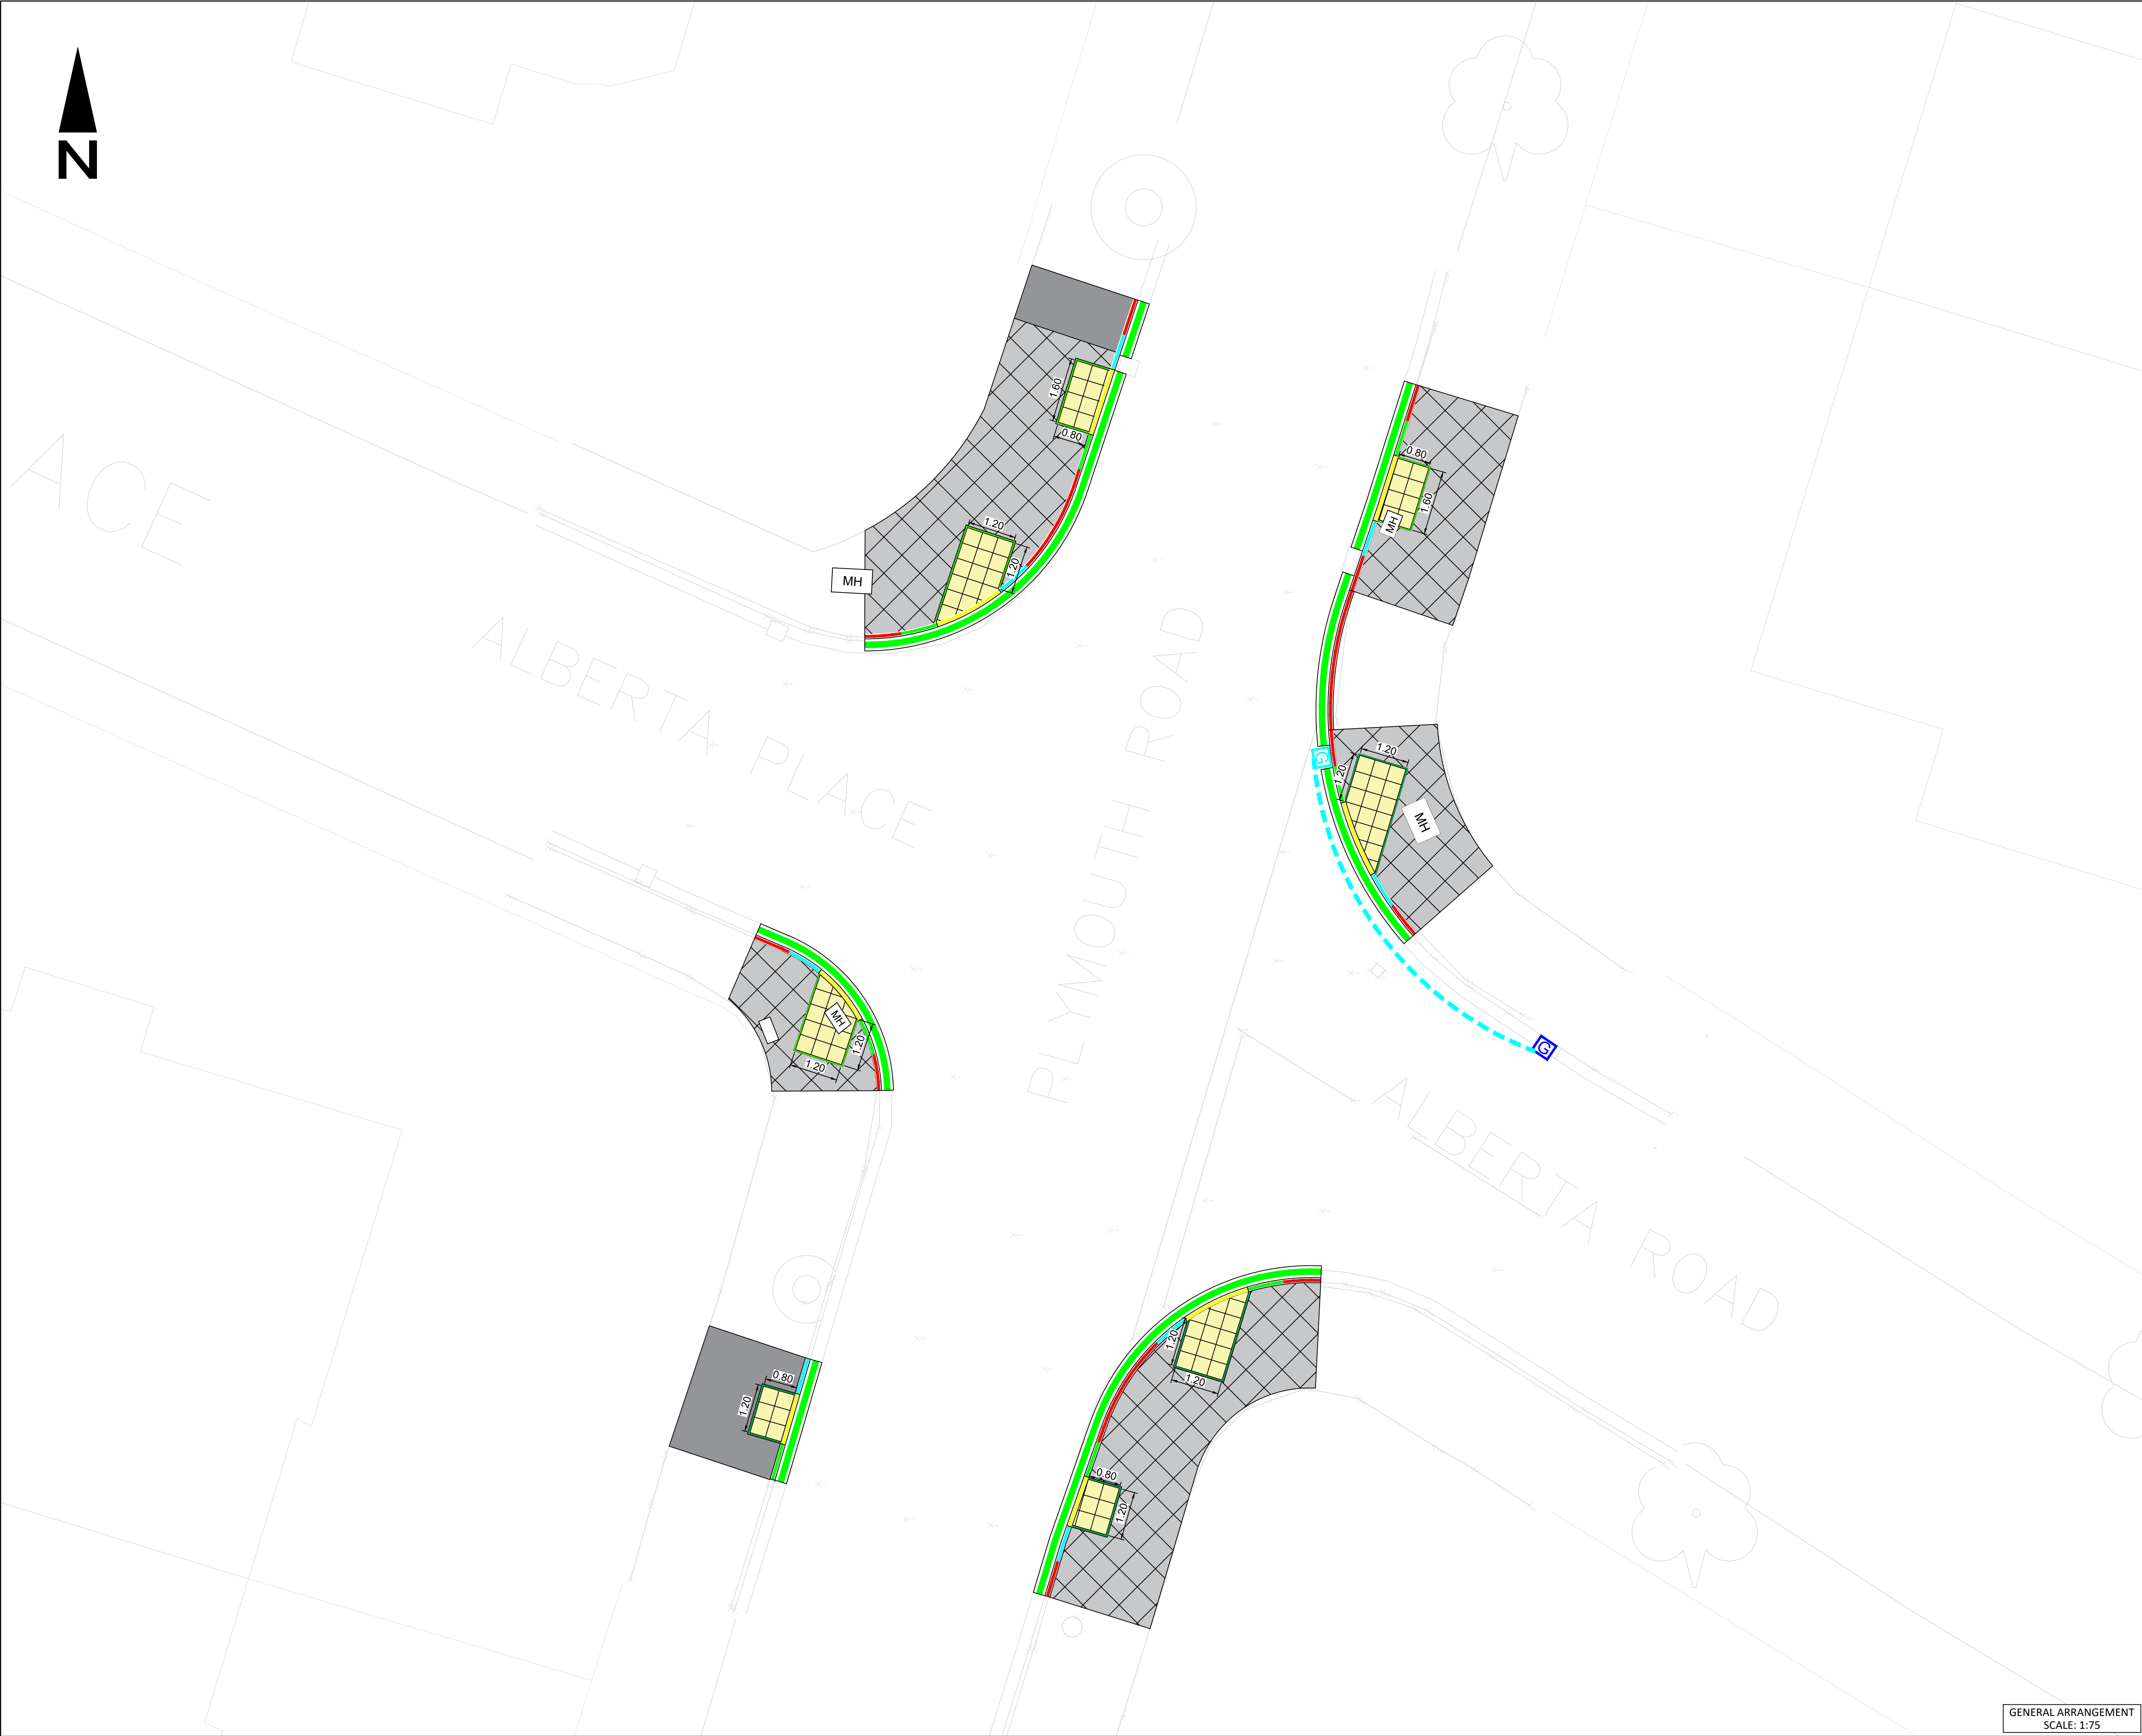

© Hawffraint y Goron a hawliau cronfa ddata 2016 Arolwg Ordnans
100025302 "Ni chaniateir i chwi gopio, tan-drwyddedu, dosbarthu
neu werthu y data yma i unrhyw drydydd barti mewn unrhyw ffurf"

	FOOTWAY CONSTRUCTION - 150mm THICK SUB-BASE TYPE 1, 50mm THICK AC20 BINDER COURSE, 25mm THICK AC6 SURFACE COURSE
	400 X 400 X 65mm TACTILE BLISTER PAVING IN BUFF LAID ON SAND BEDDING 30mm THICK AND 100mm TYPE 2 SUB-BASE
	400 X 400 X 50mm PRECAST CONCRETE SLAB(S) IN FOOTWAY ON 30 mm THICK COMPACTED SAND BEDDING
	CONSERVATION KERB (125mm UPSTAND)
	HB2 to BN1 DROPPER KERB (LEFT)
	HB2 to BN1 DROPPER KERB (RIGHT)
	BN1 KERB (0-6mm UPSTAND)
	PROPOSED TYPE EF FLAT TOP EDGING KERB
	PENNANT KERBS
	EXISTING GULLY TO BE REPLACED
	PROPOSED NEW GULLY
	150mm INTERNAL DIAMETER THERMOPLASTIC STRUCTURED WALL PIPE

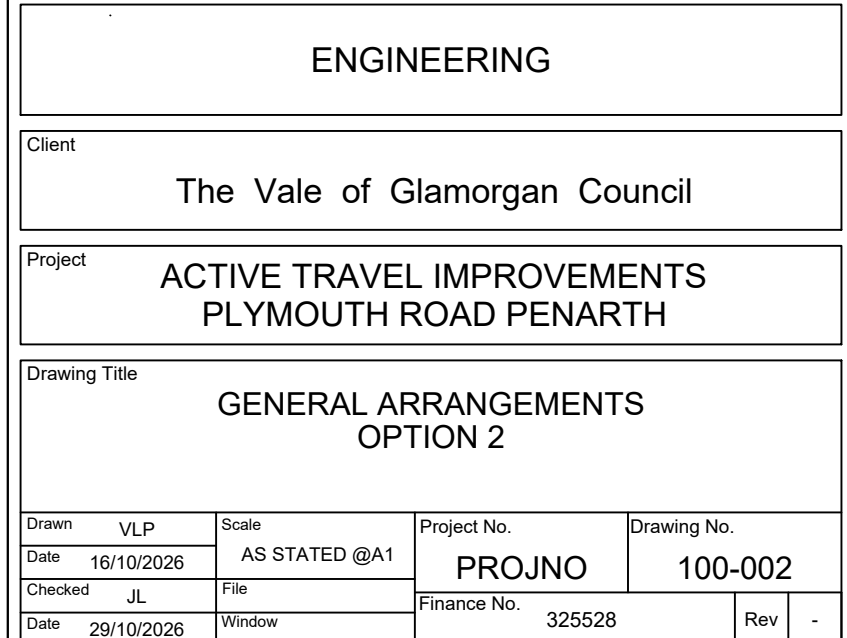[illegible]

GENERAL ARRANGEMENT
SCALE: 1:75

Dyddiad/Date 02/11/26
Gofynnwch am/Ask for Stephen Irish
Rhif ffôn/Telephone 01446 700111
Ffacs/Fax
e-bost/e-mail ConstructandDevSection@
bromorgannwg.gov.uk

Cyngor Bro Morgannwg
Yr Alpau, Gwenfô CF5 6AA

The Vale of Glamorgan Council
The Alps, Wenvoe CF5 6AA

www.bromorgannwg.gov.uk
www.valeofglamorgan.gov.uk



Fy Nghyf/My Ref Gwelliannau Teithio Llesol /
Plymouth Road, Penarth

Annwyl Berchennog / Feddiannydd

Parthed: Gwelliannau Teithio Llesol / Plymouth Road, Penarth

Mae Cyngor Bro Morgannwg yn bwriadu gwneud gwaith gwella ar y palmant ar Plymouth Road Road, Penarth. Mae'r gwaith yn cynnwys gosod croesfannau botymog newydd a gwelliannau i'r droedffordd gyfagos.

Y bwriad ar hyn o bryd yw dechrau ar y gwaith ar 30/11/26 a disgwylir iddo gymryd tua 4 wythnos i'w gwblhau, yn amodol ar y tywydd ac unrhyw amgylchiadau annisgwyl.

Gellir gweld rhagor o wybodaeth am y cynllun, gan gynnwys lluniau sy'n dangos y gwaith arfaethedig a dogfennaeth berthnasol arall ar-lein yn:

www.valeofglamorgan.gov.uk/c&d

Fel arall, gellir cyrraedd y wybodaeth drwy ddefnyddio'r cod QR a ddarperir isod.

Bwriad y gwaith hwn yw gwella diogelwch cerddwyr a hygyrchedd i gyfleusterau trafniadaeth gyhoeddus lleol i bawb, yn enwedig rhai sydd â nam symudedd a defnyddwyr agored i niwed eraill.

Oherwydd natur y gwaith a'r trefniadau rheoli traffig sydd eu hangen, mae rhywfaint o darfu'n anochel yn ystod y cyfnod adeiladu. Rydym yn gwerthfawrogi eich amynedd a'ch dealltwriaeth yn y mater hwn a byddwn yn gwneud pob ymdrech i achosi cyn lleied â phosibl o anghyfleustra.

Os oes gennych unrhyw gwestiynau neu bryderon ynglŷn â'r gwaith arfaethedig, cysylltwch ag Adran Adeiladu a Datblygu Cyngor Bro Morgannwg gan ddefnyddio'r manylion cyswllt a ddarperir uchod.

Yn gywir



Stephen Irish
Ar ran y Rheolwr Gweithredol – Peirianeg

Date/Dyddiad 02/11/26
Ask for/Gofynwch am Stephen Irish
Telephone/Rhif ffôn 01446 700111
Fax/Ffacs
e-mail/e-bost ConstructandDevSection@
valeofglamorgan.gov.uk

The Vale of Glamorgan Council
The Alps, Wenvoe CF5 6AA

Cyngor Bro Morgannwg
Yr Alpau, Gwenfô CF5 6AA

www.valeofglamorgan.gov.uk
www.bromorgannwg.gov.uk



My Ref/Cyf Active Travel Improvements /
Plymouth Road, Penarth

Dear Owner / Occupier

Re: Active Travel Improvements / Plymouth Road, Penarth

The Vale of Glamorgan Council will be carrying out improvement works on the footway along Plymouth Road, Penarth. The works include the installation of new tactile crossings and improvements to the surrounding footway.

The works are currently programmed to commence on 30/11/26 and are expected to take approximately 4 weeks to complete, subject to weather conditions and any unforeseen circumstances.

Further information about the scheme, including drawings showing the proposed works and other relevant documentation can be viewed online at:

www.valeofglamorgan.gov.uk/c&d

Alternatively, the information can be accessed using the QR code provided below.

These works are intended to improve pedestrian safety and accessibility to local public transport facilities for all, particularly those with impaired mobility and other vulnerable users.

Due to the nature of the works and the traffic management arrangements required, some disruption is unavoidable during the construction period. We appreciate your patience and understanding in this matter and will make every effort to minimise any inconvenience as far as possible.

Should you have any questions or concerns regarding the proposed works, please contact the Vale of Glamorgan Council's Construction and Development Section using the contact details provided above.

Yours faithfully

Stephen Irish
For Operational Manager - Engineering

